

VCR3-FES-M

ErgoRack, Ford E-Series

Two Crossbars, Powder Coat Finish
Rack Weight (empty): 113 lbs

*Callouts in this Configuration Overview indicate full module assemblies only.

For details on individual parts, please refer to the linked Module Overviews below.

- A: [FEA-0008 Clamp Down Assembly](#)
- B: [CBR-0003 Crossbar Assembly](#)
- C: [FEA-0002 Rotation Assembly](#)
- D: [CBR-0004 Crossbar Assembly](#)
- E: [FEA-0022 5' Connecting Bar](#)
- F: [FEA-0015 Rotation Driveshaft Feature](#)
- G: [FBM-1067-BLK Mounting System](#)


[Modular Assembly Manuals](#)

ErgoRack Van—Load specifications:

Check vehicle manufacturer recommendations for roof capacity weight limits.

CROSSBAR SPACING	STEP LADDER	EXT. LADDER
4 ft Spacing	6 – 8 ft.	16 – 20 ft.
5 ft Spacing	8 – 10 ft.	16 – 24 ft.
6 ft Spacing	8 – 12 ft. [†]	16 – 28 ft.
7 ft Spacing	10 – 12 ft. [†]	20 – 32 ft.
8 ft Spacing	10 – 12 ft. [†]	20 – 36 ft.

[†]Rotation Configurations: 12 ft. step ladders require an extended upper add-on component.

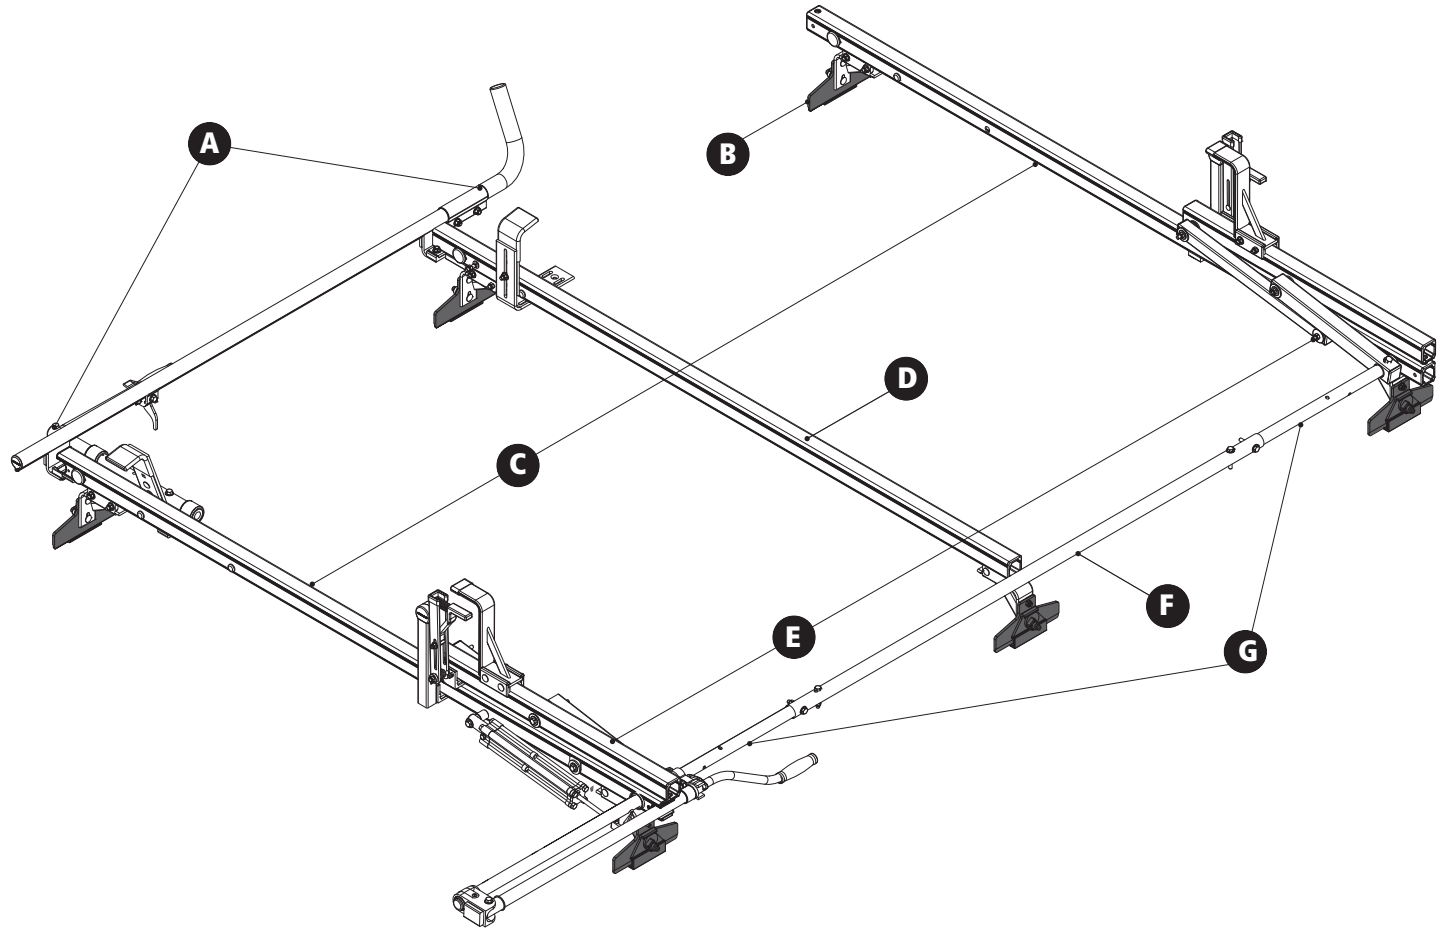

VCR3-FES-M


ErgoRack, Ford E-Series

Approximate dimensions as shown:


- A: Rack Width 75"
- B: Rack Height 18"
- C: Rear Crossbar Offset (Left).....Even
- D: Mount Bolt Spacing L/R..... Variable
- E: Crossbar Spacing (rear to center)4'
- F: Crossbar Spacing (center to front)4'
- G: Rack Length..... 139"

**5' Connecting Bars (sold separately) are required for spacings that exceed 6'—contact Sales & Service.*

3' Connecting Bar (Included in current configuration)




5' Connecting Bar (Sold separately)



Compatible Accessories Available (Sold Separately)

- 5' Rotation Connecting Bar [FEA-0022](#)
- 8'–12' Conduit Carriers [CON Series](#)
- WorkPro LED Lighting..... [LED Series](#)
- Systems and Safety Components [RVS Series](#)
- Safety monitoring [DS2 Series](#)

USOV-VCR3FESM-US01 Rev-A 0522

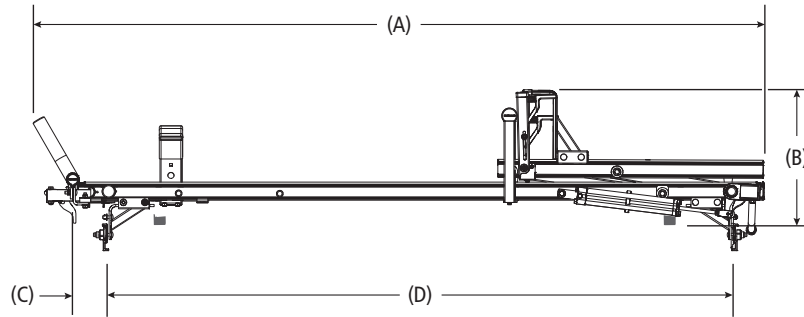

Rear Drive Shaft Offset: 24"

Note: The end of the driveshaft must not extend beyond the vehicle bumper

