

ErgoRack®

PRIME DESIGN™

For Compact & Mid Size Pickup Truck

ErgoRack eliminates the strain from unloading and stowing heavy ladders onto work vehicles.

This regularly performed operation can get cumbersome, especially when factoring in ladder weights, ladder lengths, operator body types, and vehicle heights. Quite often, a worker takes the unnecessary risk of climbing on a vehicle's tire or bumper to complete this task.



■ Easy to use

Make unloading and stowing heavy ladders from a vehicle's roof easy and with less strain.

■ Enhance Safety

Ladder deployed to operator versus climbing on bumper or tire which eliminates slip and fall hazards.


■ Improve productivity

Deploy or stow in less than 20 seconds.

■ No Drill Installation

Maintain vehicle warranty and resale value with no holes to drill.

Features:



Ergonomically Designed



Hydraulically Dampened Descent



Auto Clamped



Easy Compatibility



Built-In Security



Built for Efficiency



Customizable Configurations

TO LEARN MORE VISIT: PRIMEDESIGN.NET/PRODUCTS/ERGORACK/ OR SCAN THE QR CODE




For Compact & Mid Size Pickup Truck



CC-PU2-62-M
Dual Clamp



RR-PU1-57-M
Dual Rotation

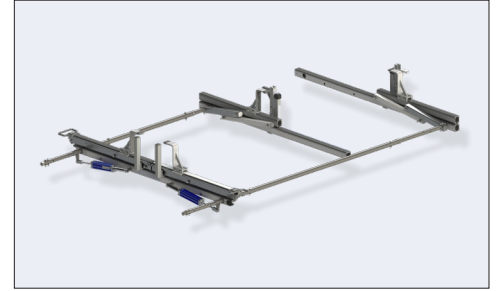

RR3-PU2-62-M
Dual Rotation with 3rd Crossbar

Models for less than 5 ft. Beds	Models for 5-6 ft. Beds	Streetside Feature	Curbside Feature	Crossbar Length PU1 / PU2 Models	Rack Weight PU1 / PU2 Models	Max. Crossbar Spacing PU1 / PU2 Models
BB-PU1-57-M	BB-PU2-62-M	End Stop	End Stop	57 / 62	23 / 25 lbs	5' / 6'
BC-PU1-57-M	BC-PU2-62-M	End Stop	Clamp	57 / 62	34 / 36 lbs	5' / 6'
CC-PU1-57-M	CC-PU2-62-M	Clamp	Clamp	57 / 62	46 / 48 lbs	5' / 6'
BR-PU1-57-M	BR-PU2-62-M	End Stop	Rotation	57 / 62	58 / 60 lbs	5' / 6'
-	BR3-PU2-62-M	End Stop (3 CBR)	Rotation	57 / 62	72 lbs	5' / 6'
CR-PU1-57-M	CR-PU2-62-M	Clamp	Rotation	57 / 62	69 / 71 lbs	5' / 6'
-	CR3-PU2-62-M	Clamp (3 CBR)	Rotation	57 / 62	83 lbs	5' / 6'
RR-PU1-57-M	RR-PU2-62-M	Rotation	Rotation	57 / 62	94 / 96 lbs	5' / 6'
-	RR3-PU2-62-M	Rotation (3 CBR)	Rotation	57 / 62	108 lbs	5' / 6'

Universal Mounting Hardware

MPK-0007	Adjustable Universal Mounting Feet	4 lbs.
----------	------------------------------------	--------

Notes:

- Aluminum commercial style pickup caps will require reinforcement plates. Contact customer service for details.
- If carrying a long extension ladder and a short step ladder (6 ft or less), a three crossbar rack is suggested.
- The crossbar spacing of 3 crossbar racks are either 4 or 5 ft. If 6 ft. crossbar spacing is required, order 2 crossbar rack equivalent + required third crossbar module.
- Check the vehicle manufacturer's recommendation for roof capacity weight limits.
- A wide range of accessories are available including conduit carriers, light holders, and more.

Pickup Crossbar Spacing and Ladder Size Guide

Crossbar Spacing	Step Ladder Size	Extension Ladder Size
4 ft spacing	6 – 8 ft.	16 ft.
5 ft spacing	8 – 10 ft.	16 – 20 ft.
6 ft spacing	8 – 12 ft.*	16 – 24 ft.
7 ft spacing	10 – 12 ft.*	20 – 28 ft.
8 ft spacing	10 – 12 ft.*	20 – 32 ft.

*12 ft. step ladders may require an extended upper add-on component

ML-7.2-4073 / 10-30-2024

Copyright ©2024 Safe Fleet and its subsidiaries. All rights reserved. No part of this publication may be reproduced by any means without written permission from Safe Fleet. The information in this publication is believed to be accurate. However, Safe Fleet does not make any representation or warranty to that effect and does not assume responsibility for any consequences resulting from use of such information. Revisions or new editions of the publication may be issued (or not issued) in our discretion to incorporate such changes.

1.877.630.7366
safefleet.net

SAFE FLEET
Driving Safety Forward™