

# ErgoRack®

**PRIME DESIGN™**

## For Ford Transit Med & High Roof

ErgoRack eliminates the strain from unloading and stowing heavy ladders onto work vehicles.

This regularly performed operation can get cumbersome, especially when factoring in ladder weights, ladder lengths, operator body types, and vehicle heights. Quite often, a worker takes the unnecessary risk of climbing on a vehicle's tire or bumper to complete this task.



### ■ Easy to use

Make unloading and stowing heavy ladders from a vehicle's roof easy and with less strain.

### ■ Enhance Safety

Ladder deployed to operator versus climbing on bumper or tire which eliminates slip and fall hazards.


### ■ Improve productivity

Deploy or stow in less than 20 seconds.

### ■ No Drill Installation

Maintain vehicle warranty and resale value with no holes to drill.

#### Features:



Ergonomically Designed



Hydraulically Dampened Descent



Auto Clamped



Easy Compatibility



Built-In Security



Built for Efficiency



Customizable Configurations

TO LEARN MORE VISIT: [PRIMEDESIGN.NET/PRODUCTS/ERGORACK/](https://PRIMEDESIGN.NET/PRODUCTS/ERGORACK/) OR SCAN THE QR CODE




# ErgoRack®

# PRIME DESIGN™

For Ford Transit Med & High Roof



**BB-FT-72-M**  
Base Rack

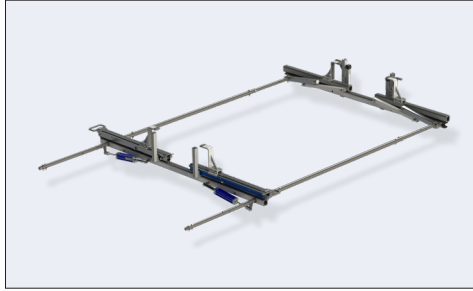

**RR-FT-72-M**  
Dual Rotation



**RR3-FT-72-M**  
Dual Rotation w/ 3rd Crossbar

Models	Vehicle Wheelbase	Vehicle Height	Street Side Feature	Curb Side Feature	Weight
BB-FT-72-M	130 IN (Regular), 148 IN (Long), or 148 IN XL (Long Ext.)	101 IN (Med) or 110 (High)	End Stop	End Stop	43 lbs
BR-FT-72-M	130 IN (Regular) or 148 IN (Long)	101 IN (Med) or 110 (High)	End Stop	Rotation	98 lbs
RR-FT-72-M	130 IN (Regular) or 148 IN (Long)	101 IN (Med) or 110 (High)	Rotation	Rotation	153 lbs
RR3-FT-72-M*	130 IN (Regular), 148 IN (Long), or 148 IN XL (Long Ext.)	101 IN (Med) or 110 (High)	Rotation (3 CBR)	Rotation	164 lbs

\* 3 Crossbar Rack

**Notes:**

- Crossbar spacing and the vehicle's wheelbase length will dictate the ladders that can be carried.
- Crossbars can be spaced at five, six, seven, or eight feet.
- A 3rd crossbar can be spaced four, five, six, or seven feet.
- If carrying a long extension ladder and a short step ladder, a three crossbar rack is suggested.
- Contact Prime Design customer service for application specific questions.
- Check the vehicle manufacturer's recommendation for roof capacity weight limits.
- A wide range of accessories are available including conduit carriers, light holders, and more.

**Van Crossbar Spacing and Ladder Size Guide**

Crossbar Spacing	Step Ladder Size	Extension Ladder Size
4 ft spacing	6 – 8 ft.	16 – 20 ft.
5 ft spacing	8 – 10 ft.	16 – 24 ft.
6 ft spacing	8 – 12 ft.*	16 – 28 ft.
7 ft spacing	10 – 12 ft.*	20 – 32 ft.
8 ft spacing	10 – 12 ft.*	20 – 36 ft.

\*12 ft. step ladders may require an extended upper add-on component

ML-7.2-4055 / 10-30-2024

Copyright ©2024 Safe Fleet and its subsidiaries. All rights reserved. No part of this publication may be reproduced by any means without written permission from Safe Fleet. The information in this publication is believed to be accurate. However, Safe Fleet does not make any representation or warranty to that effect and does not assume responsibility for any consequences resulting from use of such information. Revisions or new editions of the publication may be issued (or not issued) in our discretion to incorporate such changes.

1.877.630.7366  
safefleet.net

SAFE FLEET  
Driving Safety Forward™